


↑ STEEL LANYARD "I"

Steel anchoring lanyard. Useful for tree care or welding at height.

DESCRIPTION

Steel wire cable with the diameter 6 mm is protected by thick PVC tube. Outer diameter of the tube is 13 mm.

Available in three lengths as an anchor point and lanyard:
 STEEL LANYARD 100 cm
 STEEL LANYARD 130 cm
 STEEL LANYARD 180 cm
 and in two lengths as an anchor point:
 STEEL ANCHOR 300 cm
 STEEL ANCHOR 500 cm

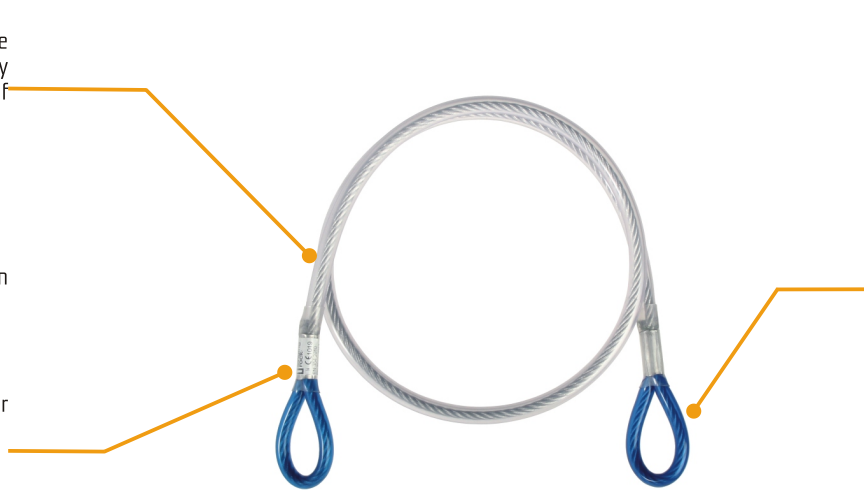

Attachment loops have different colors:
 length 100 cm - yellow
 length 130 cm - blue
 length 180 cm - red

KEY FEATURES

- resistant against cut
- resistant against burning


STANDARDS

CE 1019
 EN 795/B
 EN 354

FEATURES



15 kN



100 cm
 130 cm
 180 cm



one person only



295 g / 10,4 oz
 350 g / 12,3 oz
 460 g / 16,2 oz



unique number




warranty

MATERIAL

- 55% zinc plated steel
- 5% aluminum alloy
- 40% PVC

TECHNICAL DATA

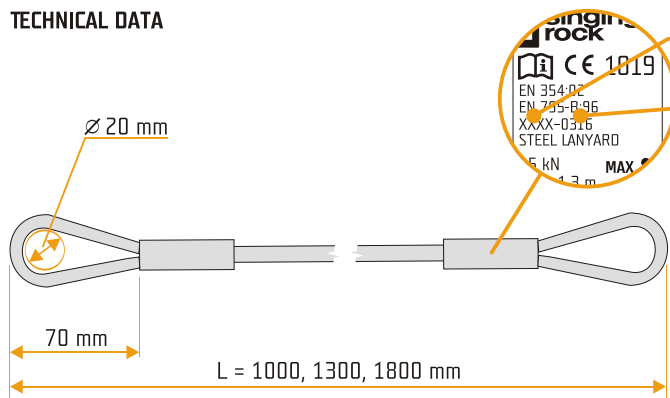

unique number
 XXXX

batch number
 MMYYY (month, year of production)

COMPARISON

STEEL LANYARD RK850 - STEEL LANYARD W2283

- thicker PVC tube for better durability
- different colors of attachment loops for better length recognition

MAINTENANCE

Without taking wear or mechanical damage into account and on conditions specified in general and specific instructions for use this product may be used 15 years since the date of production and 10 years from the date of first use, whichever is the sooner.



beware of salt



-20 - 40°C



read instruction

